


The product spectrum

No.	Model	Rated Load	Rated Speed	Motor Power	Max. Lifting Height
1	SC100/100	2×1000Kg	36m/min	2×2×11Kw	450m
2	SC200/200	2×2000Kg	36m/min	2×3×11Kw	450m
3	SC200/200BD	2×2000Kg	0-40m/min	2×3×11Kw	500m
4	SC200/200BZ	2×2000Kg	0-68m/min	2×3×18.5Kw	500m
5	SC200/200E	2×2000Kg	36m/min	2×2×13Kw	450m
6	SC200/200EB	2×2000Kg	0-40m/min	2×2×13Kw	500m
7	SC200/200EB-II	2×2000Kg	0-46m/min	2×2×15Kw	500m
8	SC30	300Kg	26.7m/min	7.5Kw	200m





Worthy Perfect tactile experience, ultimate human care

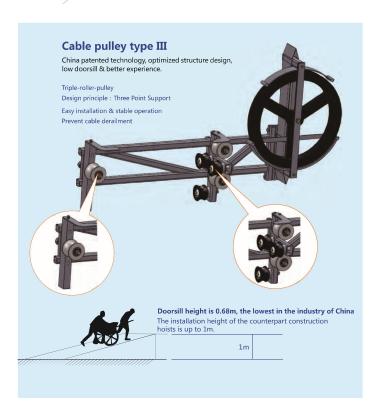



Automatic refueling system

Generated from ergonomic design BWM uses automatic refueling system More safe and labor saving Achieving multiple-point lubrication Assure you of easy maintenance





Remote control

SMS command can achieve remote control via mobile terminal for easy management.

Turn on reminder	901CF13080001101: the machine is on			
Working status inquiry	901CF13080001101 : stop, cage roof, contactor normal, lower limit side opening door open, ID is on, others normal.			
Card switch request	901CF13080001101: asking for card switch			
Warning reminder	901CF13080001101: contactor failure, over load.			
Machine on/off	0901CF13080001101: Lock down is on			
Customer setting	adding group A user: 1507486XXXX			

Advanced manufacture technology

Electrophoresis Coating Line



Mast tie and mast section (optional), external enclosure have been applied with electrophoresis technology, which can prevent rusting and corrosion of pipe inner wall and thin panel, to extend the service life.

2 Robot welding line of mast section



Advanced robot welding line





Driving device assembling line increases the production efficiency, improves the product precision, while decrease the labor intensity.

4 Commissioning platform



Each unit of hoist has to be strictly tested before delivery to ensure optimal working performance.

